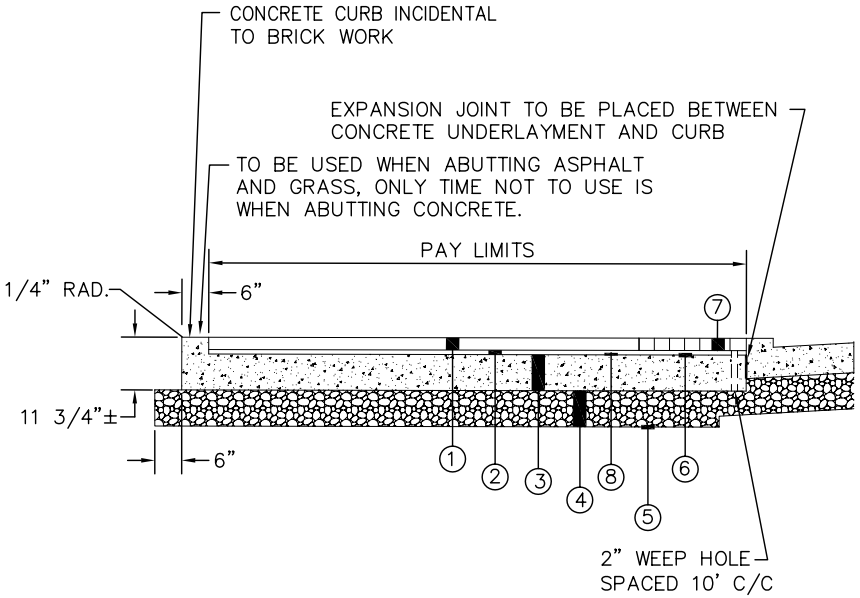

① ITEM SPECIAL, BRICK PAVING, CURB RAMP (2–1/4" BRICK)

② 3/4" ROLLED BITUMINOUS SETTING BED. (REFER TO VILLAGE FOR SPECIFICATIONS)

③ ITEM 608, 8" CONCRETE UNDERLAYMENT, CURE & SEAL WITH ONE COAT OF SUPER DIAMOND CLEAR

④ ITEM 411, 8" AGGREGATE BASE SATURATE W/ WATER PRIOR TO COMPACTION

⑤ ITEM 204, SUBGRADE COMPACTION

⑥ ITEM 407, TACK COAT @ 0.10 GAL/S.Y.

⑦ TRUNCATED DOMES (2 1/4" BRICK)

⑧ NEOPRENE MODIFIED ASPHALT ADHESIVE.

BRICK TYPICAL SECTION AT CURB RAMPS

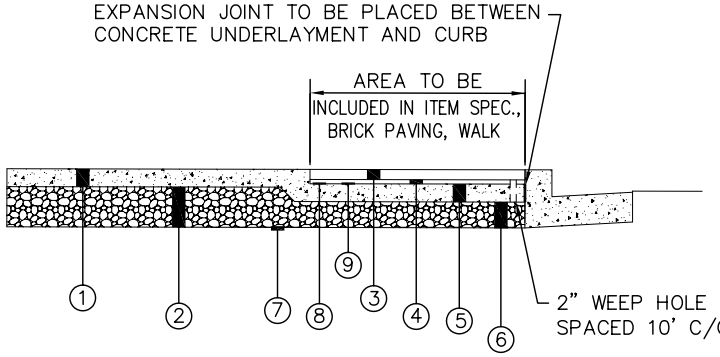

① ITEM 608, 5" CONCRETE WALK, AS PER PLAN APPLY 2 COATS OF SUPER DIAMOND CLEAR CURING AND SEALING COMPOUND, OR APPROVED EQUIVALENT PER MANUFACTURER'S RECOMMENDATION ON ALL SURFACES INCLUDING BACK IMMEDIATELY AFTER FINISHING SURFACES.

② ITEM 411, 8" AGGREGATE BASE, (IN 2 EQUAL 4" LIFTS), SATURATED W/ WATER PRIOR TO COMPACTION

③ ITEM SPECIAL, BRICK PAVING, WALK (2–1/4" BRICK), (REFER TO VILLAGE FOR SPECIFICATIONS)

④ 3/4" ROLLED BITUMINOUS SETTING BED. (REFER TO VILLAGE FOR SPECIFICATIONS)

⑤ ITEM 608, 4" CONCRETE UNDERLAYMENT, CURE & SEAL WITH ONE COAT OF SUPER DIAMOND CLEAR.

⑥ ITEM 411, 5–3/4" AGGREGATE BASE SATURATE W/ WATER PRIOR TO COMPACTION

⑦ ITEM 204, SUBGRADE COMPACTION

⑧ ITEM 407, TACK COAT @ 0.10 GAL/S.Y. NOPRENE MODIFIED ASPHALT ADHESIVE.

⑨ NEOPRENE MODIFIED ASPHALT ADHESIVE.

BRICK TYPICAL SECTION

(REFER TO SPECIFICATIONS)

VILLAGE OF ADA CHOICE ONE ENGINEERING	STREETSCAPE BRICK WITH ASPHALT LAYING COURSE TYPICAL SECTIONS	REVISIONS:	DATE APPROVED: JUNE 2006 PAGE No. 300–21